


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF DATA GENERAL CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN WHOLE OR IN PART AS THE BASIS FOR MANUFACTURE OR SALE OF PRODUCTS WITHOUT WRITTEN PERMISSION.

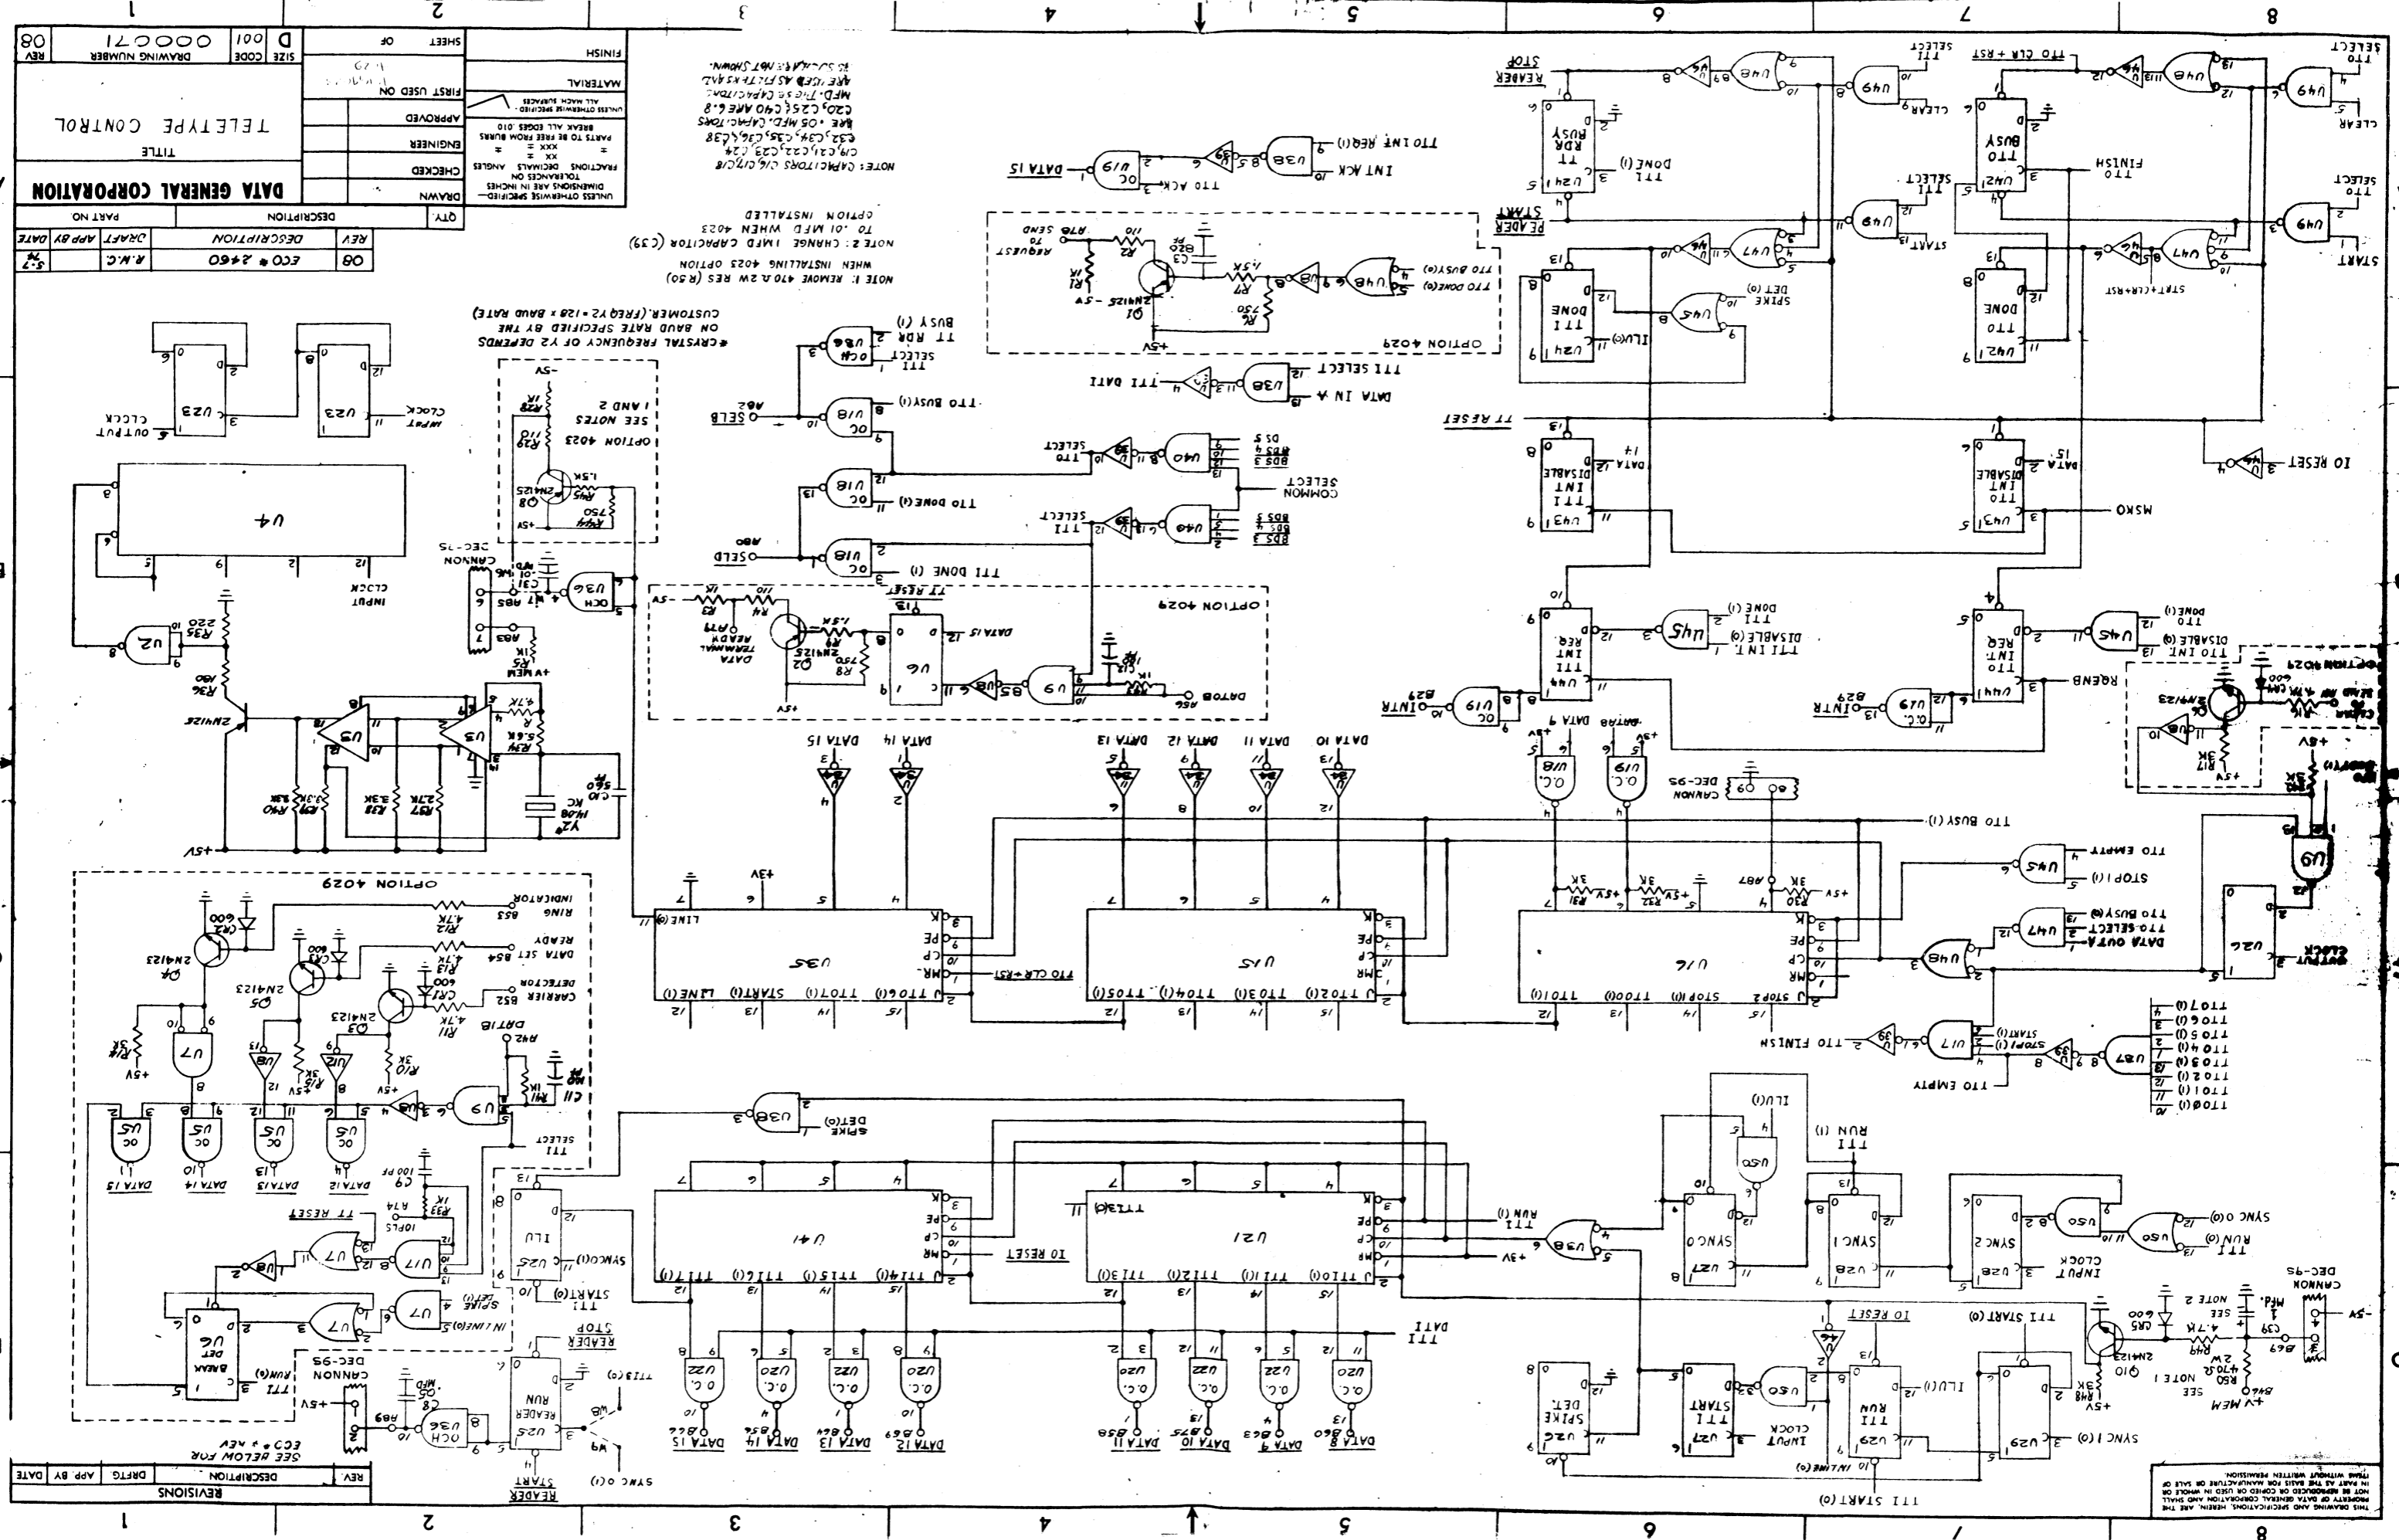

REV	DESCRIPTION	DRAFTG	APP BY	DATE
1	SEE BELOW FOR REVISIONS			

REV	DESCRIPTION	DRAFT	APP BY	DATE
08	ECC # 2#60	R.M.C.		5-77

QTY	DESCRIPTION	PART NO

FINISH	SHEET OF	SIZE	DRAWING NUMBER	REV
	12	D	000071	08

UNLESS OTHERWISE SPECIFIED - DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES CHECKED BY ENGINEER PARTS TO BE FREE FROM BURNS BREAK ALL EDGES 010 UNLESS OTHERWISE SPECIFIED MATERIAL APPROVED FIRST USED ON DATE

NOTE 1: REMOVE 470 2.2W RES (R20) WHEN INSTALLING 4025 OPTION
NOTE 2: CHANGE 1MFD CAPACITOR (C39) TO 0.1MFD WHEN 4023 OPTION IS INSTALLED

*CRYSTAL FREQUENCY OF Y2 DEPENDS ON BAUD RATE SPECIFIED BY THE CUSTOMER (FREQ Y2 = 128 X BAUD RATE)

SEE NOTES 1 AND 2
OPTION 4023

OPTION 4029

OPTION 4028

OPTION 4029

OPTION 4029

OPTION 4029

OPTION 4029

OPTION 4029

OPTION 4029

OPTION 4029

OPTION 4029

OPTION 4029

OPTION 4029

OPTION 4029