



U4 PIN 5 WITH ON

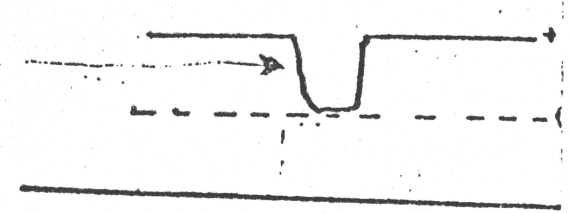

DATA IN FROM U21 PIN 10

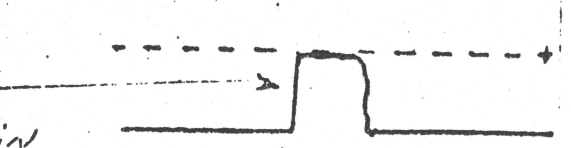

PULSE FROM U35 PINS WHEN NO DATA IN. PWA. PWA. MEASURES CHECKS FOR THIS PULSE

U4 PIN 5 WITH NO

820/1220 COPY WRITE SPEC.

This is why 1200/800 - word run in 1200/800 FRAME

NOTE: ALL CAPACITORS ARE MICROFARADS, AND RESISTORS ARE IN OHMS 1/4 WATT, WITH 5% TOLERANCE UNLESS OTHERWISE SPECIFIED.